

## **Changes to the UZF package for release version 1.3; 6-20-07**

The HUF package can be used with UZF; however, the vertical hydraulic conductivity of the unsaturated zone, VKS, must be specified within the UZF input file (i.e. IUZOPT=1; Niswonger and others, 2006, p. 30).

The calculation was changed for simulating head-dependent recharge and discharge when the ground-water head is near or above land surface. The approach conceptualizes land surface as an undulating surface that represents variations in land surface altitude within the area of a single MODFLOW cell. The average height of undulations, D, in the land surface altitude is set to 1.0 internally within UZF to avoid changing the UZF input requirements; however, D (UZF program variable SURFDEP) can be changed within the UZF source code file gwf2uzf1.f. If the source file gwf2uzf1.f is changed then the program must be recompiled. This approach for simulating recharge and discharge reduces the iterations required for convergence and allows a smooth transition between a recharging and discharging condition.

### ***Ground-water recharge***

The specified infiltration (i.e. UZF input file variable FINF; Niswonger and others, 2006, p. 32) is applied to the saturated zone instead of the unsaturated zone if the ground-water head is above land surface (i.e. Discretization file input variable TOP; Harbaugh, p. 8-11) minus one-half the undulation depth, D (fig. 1). The units of the undulation depth are the same as those specified by variable LENUNI in the

Discretization File. Recharge to the saturated zone decreases as a function of ground-water head, often called rejected recharge, and is calculated according to:

$$\begin{aligned} q &= 0 & h^{n-1} &> TOP + 0.5D \\ q &= \frac{FINF}{D} [h^n - (TOP - 0.5D)] & TOP - 0.5D &\leq h^{n-1} \leq TOP + 0.5D \\ q &= FINF & TOP - 0.5D &> h^{n-1} \end{aligned}$$

where

$q$  is the recharge, in length per time;

$FINF$  is the infiltration rate applied to the finite-difference cell, in length per time;

$h^n$  is the ground-water head for time step m and iteration  $n$ , in length;

$h^{n-1}$  is the ground-water head for time step m and iteration  $n-1$ , in length;

$D$  is the undulation depth along land surface within the finite-difference cell, in length; and

$TOP$  is the altitude of land surface, in length.

### **Ground-water discharge**

Ground-water discharge to land surface is computed as:

$$\begin{aligned} Q &= CND(h^n - (TOP - 0.5D)) \\ CND &= \frac{K_v A_{fdc}}{0.5celthkD} (h^{n-1} - TOP + 0.5D) & TOP - 0.5D &< h^{n-1} \\ CND &= 0 & TOP - 0.5D &\geq h^{n-1} \end{aligned}$$


where

$CND$  is the conductance across land surface, in length squared per time;

$K_v$  is the vertical hydraulic conductivity of the unsaturated zone, in length per time;

$celthk$  is the thickness of the model cell, in length;

$Q$  is the volumetric-flow rate of water that discharges from ground water to land surface, in length cubed per time.

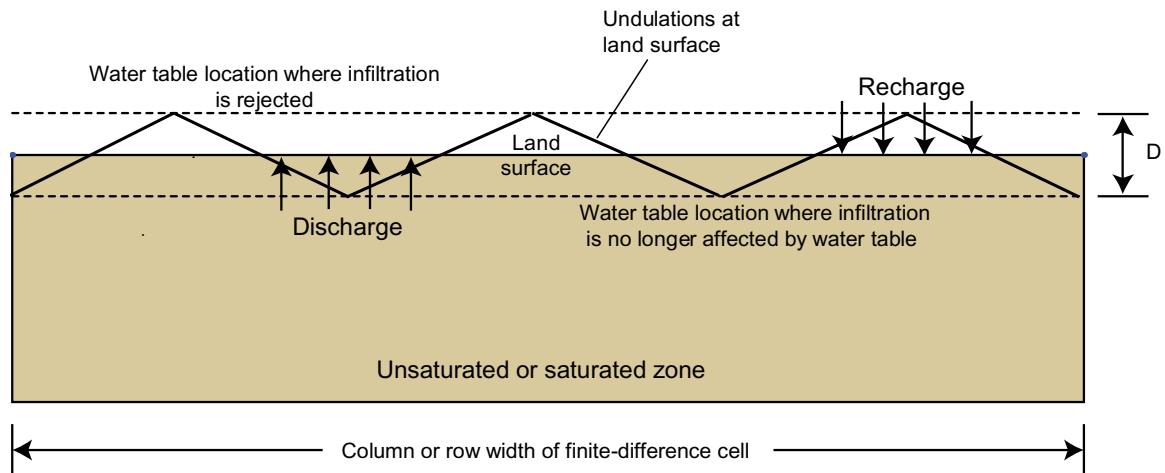

**Figure 1.** The effect of undulation depth,  $D$ , at land surface on ground-water recharge and discharge in relation to the water table in a finite-difference cell.

## References

Niswonger, R.G., Pradic, D.E., and Regan, R.S., 2006, Documentation of the Unsaturated-Zone Flow (UZF1) Package for modeling unsaturated flow between the land surface and the water table with MODFLOW-2005: U.S. Geological Survey Techniques and Methods Book 6, Chapter A19, 62 p.

Harbaugh, A.W., 2005, MODFLOW-2005, the U.S. Geological Survey modular ground-water model—the Ground-Water Flow Process: U.S. Geological Survey Techniques and Methods 6-A16, variously paginated.