

Water Resources Center Annual Technical Report FY 2003

Introduction

The Rhode Island Water Resources Center has funded four proposals for FY 03. Two of the proposals were technology transfer and two were research. The technology transfer proposals were to set up web sites with water resources information. The information that was made available included reservoir water levels to aid in water conservation. A web site was set up to allow access to the Rhode Island Water Resources Centers research reports. The research funded projects included the enhancement of water conservation by conducting a water balance as well as an investigation of the potential of nitrate removal from groundwater.

Research Program

The research grants focused on the areas of water conservation and groundwater treatment for nitrates.

URI Water Conservation Program Development

Basic Information

Title:	URI Water Conservation Program Development
Project Number:	2003RI14B
Start Date:	3/1/2003
End Date:	2/28/2004
Funding Source:	104B
Congressional District:	2
Research Category:	Engineering
Focus Category:	Conservation, Management and Planning, Water Supply
Descriptors:	conservation, water management
Principal Investigators:	Vincent celmer Rose

Publication

Since water use on the University of Rhode Island Campus is not metered by building, the first task was to audit all of the buildings on the Kingston Campus that are connected to the URI water system .This included determining the types of use (drinking, waste transport and cooling) as well as the types and number of fixtures. The survey included information about academic, residential, athletic, research, office and food service buildings. A companion study also surveyed the utility rooms in these buildings that focused primarily on steam condensate return. In addition, estimates have been obtained of the number of people using each building as well the amount of water being used to irrigate the athletic and turf fields.

An EPA computer program "Wave Saver" has been obtained and has been used to estimate water use in the various areas . The total amount of water used has been compared to the amount of water pumped from the University of Rhode Island well. Although the estimated amount was somewhat less than the actual amount pumped, the numbers are acceptable. The data is now being analyzed to determine appropriate efforts to reduce use.

At the time of the survey only 40% of the condensate was being returned to the heating (steam generating) plant. Efforts by Facilities Department this spring have increased the condensate return to 50%. These efforts are on-going. In addition replacement of bathroom fixtures are being evaluated. About three quarters of the amount of water used is attributed to indoor plumbing.

During the audit a number of situations were observed where water use could be immediately reduced. These included changing the blow-down frequency on a building cooling tower, repairing stuck or inoperable water fixtures and condensate return pumps.

The final product from this project is a fully operational copy of "Wave Saver" that can be used to improve the operation of the water system and permit evaluation of the savings in making proposed changes. In addition the project has made the 5 engineering students who have worked on the project familiar with water conservation and various aspects of the operation of water systems and the methods of evaluating components used in a system.

Impact of Common Landscaping Plants on Nitrate Leaching

Basic Information

Title:	Impact of Common Landscaping Plants on Nitrate Leaching
Project Number:	2003RI18B
Start Date:	3/1/2003
End Date:	2/28/2004
Funding Source:	104B
Congressional District:	2
Research Category:	Not Applicable
Focus Category:	Water Quality, Groundwater, Nitrate Contamination
Descriptors:	groundwater mediation, contamination
Principal Investigators:	Jose Amador

Publication

1. Amador, J. A., R. J. Hull, E. L. Nicosia, and J. T. Bushoven. 2004. Fate of nitrate under common landscaping plants. Journal of Environmental Quality (In review)

INTRODUCTION

Aesthetically pleasing, managed landscapes contribute to the quality of life in urban, suburban, and rural settings. These landscapes may include large open spaces like parks, ornamental gardens and golf courses, or other communal sports facilities, as well as smaller planting assemblies, such as typical backyard gardens. Ornamental plantings may cover relatively large areas, contiguously or as the multi-yard mosaics typical of residential subdivisions. Despite their prevalence, little is known about NO_3 leaching under managed landscapes.

Because of the predominance of lawn coverage in ornamental landscapes, water quality research has focused on NO_3 leaching from the turf-soil ecosystem. In a review article on the fate of nitrogen applied to turf, Petrovic (1990) concluded that only a small amount of fertilizer nitrogen (<10%) normally leaches from established turf to groundwater, a finding mirrored by other studies (Gold et al., 1990). More recently Jiang et al. (2000) have shown that even when the grass is killed, turf sites retain 90% of their accumulated nitrogen during the ensuing year even if no vegetation is replanted. If turf is re-established soon after death, a normal nitrogen retention pattern is restored within three months of reseeding (Bushoven et al., 2000).

To assess the environmental impact of residential, institutional or municipal landscaping fully, all components of the landscape must be evaluated for their ability to retain nitrogen. Erickson et al. (2001) reported in a plot study of nitrogen mobility in landscape plantings that mixed species plantings leached ten times more NO_3 than did the St. Augustinegrass [*Stenotaphrum secundatum* (Walt.) Kuntze] turf (48.3 vs. 4.1 kg $\text{NO}_3\text{-N ha}^{-1}$). The study was conducted on recently established plots (<1 year old) that were fertilized at 300 and 150 kg N $\text{ha}^{-1}\text{yr}^{-1}$ for the grass and mixed-species, respectively. While instructive, this study likely does not reflect the NO_3 mobility maintained under minimum fertility in more northern climates.

Little is known about the pools of carbon and nitrogen in landscape plantings, both factors that likely contribute to the cycling and retention of nitrogen. In their studies of carbon sequestration in the turf-soil ecosystem of Colorado golf courses, based on an analysis of historic soil-testing data, Qian and Follett (2002) found that organic matter accumulated rapidly for 25 to 30 years at rates approaching one ton per hectare per year. Soil organic matter content reached 4 to 5% of dry soil mass within that period. This would be equivalent to approximately 3,000 kg organic N ha^{-1} . In a follow-up study using a grassland ecosystem model, Qian et al. (2003) determined that if clippings were retained on turf after 30 years and fertilizer rates were not reduced, significant NO_3^- leaching would occur. Similar results were reported by Porter et al. (1980) in a study of variously aged lawns in New York. We currently have no data on the nitrogen mobility of other landscape plant communities. For turf, the evidence to date suggests that nitrogen retention may be linked to the maturity of the turf-soil ecosystem, as has been observed in forest ecosystems (Emmett et al., 1994)

The research reported here addresses the issue of N retention in fully established landscape plantings utilizing a reasonably mature, complex landscape managed according to a minimum maintenance schedule.

MATERIALS AND METHODS

Study Area

The study was conducted in the Horticultural Display Garden and the Learning Landscape, both on the Kingston Campus of the University of Rhode Island. Both areas were established between 1994 and 1995 on land that had been a landscaped site for at least 50 years. The soil in areas covered with turfgrass were limed ($1,952 \text{ kg ha}^{-1}$) once, prior to sodding with Chewings fescue (*Festuca rubra* spp. *commutate*) in 1994. Turfgrass areas were fertilized with $\sim 48.4 \text{ kg ha}^{-1}$ approximately once a year in the spring. Shredded bark mulch (2 - 3") was applied to shrub, tree and perennial flower beds annually.

Locations for soil and soil water sampling were chosen to represent a range of landscape vegetation types. These included annual flowers (AF, n=3), perennial flowers (PF, n=4), deciduous trees (DT, n=3), deciduous shrubs (DS, n=4), evergreen trees (ET, n=4), evergreen shrubs (ES, n=6), ground covers (GC, n=5), turf (T, n=4), native woodland (W, n = 5), and unplanted-mulched areas (BL, n=5). Distance from the Learning Landscape to the woodland area sampled was approximately 500 m. The scientific and common names of plants included in each group are shown in Table 1.

Sampling

Ceramic suction cup lysimeters (2.25-cm o.d., 7-cm long) were installed vertically at 50 or 60 cm depth, and at approximately half the distance from the center to the edge of a planting (for AF, PF, DS, ES, and GC) or the trunk to the edge of the drip line of a tree (for ET, DT, and W). Lysimeters were placed in the center of the area planted to turf (T) or covered by mulch only (BL). Suction (-80 kPa) was applied for 1 h using a hand vacuum pump (SoilMoisture Equipment Corp., Santa Barbara, CA) one or two days after rainfall events exceeding 25 mm. The water samples were passed through a Whatman No. 42 filter, and the filtrate stored in 20-mL plastic vials at 4°C . Nitrate in soil water was determined colorimetrically as described below.

Soil samples were collected monthly from the top 10 cm with a 2.5-cm dia. steel core sampler while the ground was not frozen within 30 cm of the lysimeters. Mulch and leaf litter were removed from the surface before sampling. Soil samples were stored in sealable plastic bags at 4°C .

Analyses

Soil NO_3 and NH_4 were extracted according to the method of Keeney and Nelson (1982). Soil (1 g fresh weight) was extracted with 10 mL 2 N KCl solution for 30 min and the extract passed through a Whatman #42 filter. The filtrate and lysimeter water samples were analyzed for NO_3 and NH_4 colorimetrically using an automated nutrient analyzer (Alpkem Flow Solution IV, OI Analytical, College Station, TX).

Soil moisture was determined gravimetrically by drying soil (5 g) at 105°C for 24 h. Soil pH was determined by adding 10 mL deionized distilled water to 1 g soil. The mixture was allowed to equilibrate for 1 h and the pH of the solution determined using a pH meter (Denver Instrument, Denver, CO) (Hendershot et al., 1993). The organic matter content of the soil was determined by mass loss-on-ignition at 550°C for 4 h (Karam, 1993).

Statistical Analyses

Pooled data were not normally distributed, so differences in soil NO₃ and NH₄ and soil water NO₃ concentrations among vegetation types were evaluated using a one-way analysis of variance on ranks. Dunn's Multiple Range Method was used to identify statistically significant differences among vegetation types ($P < 0.05$).

RESULTS

Soil Organic Matter and pH

The pH and organic matter content of soils under different vegetation types are shown in Table 2. Soil organic matter ranged from 99 g kg⁻¹ in turf to 242 g kg⁻¹ in the woodlands. Woodland soil had the lowest pH value (5.2), with soil from other vegetation types ranging in pH from 5.9 to 6.4.

Soil Water Nitrate

Median NO₃ concentrations in soil water as a function of sampling date are shown in Fig. 1. Soil water was sampled on 23 separate dates during the 20-month study period. A particularly dry summer made it difficult to obtain soil water samples in 2002. We report median values because the data were not normally distributed. The range of median NO₃ concentrations was greater in June of 2002 than in 2003, with the reverse being true in November of these two years. Median soil water NO₃ levels were higher than the drinking water regulatory limit of 10 mg NO₃-N L⁻¹ in three of the 10 vegetation types evaluated, with frequency of exceedence following the order: GC (39%) > T (20%) > BL (10%). The high median soil water NO₃⁻ concentrations recorded during June 2002 for GC and BL were probably due to soil disturbance during resetting of lysimeters, which were raised to avoid a silt layer at 60 cm.

Values of NO₃ concentration in soil water were pooled for the entire sampling period and are shown in Table 3. Median NO₃ levels spanned over two orders of magnitude. No statistically significant differences were observed among GC, BL, T, DT, and ET, with these vegetation types representing the highest median soil water NO₃ concentrations (1.4 to 7.8 mg NO₃-N L⁻¹). The middle range of soil water NO₃ concentrations (0.2 to 0.3 mg NO₃-N L⁻¹) included PF, AF, DS, and ES, with no statistically significant differences among the vegetation types within this group. The woodlands had the lowest soil water NO₃ level (0.01 mg NO₃-N L⁻¹). Statistically significant differences were observed among the vegetation types in the low, medium and high soil water NO₃ concentration groups.

Soil Extractable Nitrate and Ammonium

Extractable soil NO₃ levels followed opposite temporal trends in 2002 and 2003 (Fig. 2). Nitrate concentrations declined steadily by an order of magnitude from June to December of 2002, whereas an increase of almost two orders of magnitude was observed over the same period in 2003. Soil NO₃ levels were in the range of 1 to 10 μg NO₃-N g⁻¹ on most of sampling dates. The woodlands constituted the exception, with NO₃ values consistently lower than 1 μg NO₃-N g⁻¹ throughout the sampling period.

Pooled median extractable soil NO₃ levels in the woodland soil were 0.5 μg NO₃-N g⁻¹, about an order of magnitude lower than for all other vegetation types, and were significantly different from them (Table 3). No statistically significant differences were

observed among all other vegetation types, with soil NO₃ concentrations ranging from 3.1 μg NO₃-N g⁻¹ for annual flowers to 7.8 μg NO₃-N g⁻¹ for turf.

Temporal trends in extractable soil NH₄ levels were similar to those observed for NO₃ (Fig. 3), with values declining about an order of magnitude from June to December 2002, and steadily increasing over two orders of magnitude from June to December 2003. As with extractable soil NO₃, NH₄ concentrations were within the range of 1 to 10 μg NH₄-N g⁻¹ for most of the sampling period.

Analyses of pooled data indicated that levels of extractable soil NH₄ ranged from 3.6 μg NH₄-N g⁻¹ for perennial flowers and evergreen trees to 10.1 μg NH₄-N g⁻¹ for annual flowers (Table 3). Statistically significant differences were observed between those vegetation types with low NH₄ levels (PF, ET, GC) and those with high levels (W, DT, AF).

Relationship of Soil Water Nitrate to Surface Soil Properties

Correlation analyses using the Pearson Product Moment method revealed a statistically significant negative correlation between the log₁₀ of soil water NO₃ and soil organic matter ($r = -0.713$, $P = 0.0206$) and a positive correlation between log₁₀ soil water NO₃ and extractable soil NO₃ ($r = 0.779$, $P = 0.0079$), whereas there was no correlation when untransformed values of soil water NO₃ were used (Fig. 4). In contrast, no statistically significant correlation was found between log₁₀ water NO₃ and either soil pH ($r = 0.514$, $P = 0.129$) or extractable soil NH₄ ($r = -0.301$, $P = 0.398$). Multiple linear regression analysis using a best subset approach indicated that the log₁₀ soil water NO₃-N could be predicted based on soil OM and extractable nitrate levels ($r^2 = 0.644$) using the equation:

$$\log_{10} \text{ soil water NO}_3 = -0.362 + (0.223 * \text{soil extractable NO}_3) - (0.0496 * \text{soil OM})$$

DISCUSSION

Our results show that landscaping vegetation types differ considerably in terms of soil water NO₃ concentrations found 50-60 cm below the soil surface. At one end of the spectrum woodlands exhibited the lowest NO₃ concentrations, whereas trees, turf, ground covers, and unplanted areas are at the other extreme, with flowers and shrubs occupying the middle ground. Of these, ground cover, unplanted areas, and turf had median concentrations of NO₃ that were equal to or higher than the 10 mg NO₃-N L⁻¹ regulatory limit for drinking water (Hallberg, 1989) at some point during the year. Examination of pooled data for extractable NO₃ concentration in surface (0 - 10 cm) soil revealed statistically significant differences between the woodlands and all other vegetation types, but no differences among the remaining vegetation types (Table 3). The acidic pH of woodland soil (5.2) could have slowed nitrification rates, resulting in higher NH₄ levels (Table 3).

There was a statistically significant correlation between extractable soil NO₃ concentration in the upper 10 cm and the log₁₀ of NO₃ concentration in soil water at a depth of 50-60 cm, but not when the untransformed soil water NO₃ concentration was used. A correlation between extractable soil NO₃ and soil water NO₃ would have suggested that the changes in the concentration of nitrate in soil water was the result of the same processes, likely dilution occurring as a result of leaching, across all vegetation types. The fact that soil water NO₃ concentration increases disproportionately with

surface soil extractable NO_3 concentration suggests that the relative importance of processes controlling NO_3 levels (e.g. microbial immobilization, nitrification, denitrification) differs under different types of vegetation.

In the case of turf, fertilizer inputs are a likely explanation for higher NO_3^- levels, as is the large amount of N_2 -fixing clover intermixed with the grass. This is the first report of elevated soil NO_3 leaching from clover-invaded turf. The elevated extractable soil NO_3 during late summer, when turf roots are inhibited by high temperature (Jiang and Huang, 2000) but clover roots may remain healthy, indicate the importance of the N contribution by clover. Turf was irrigated and prevented from entering a drought-induced summer dormancy, but high temperatures could not be avoided.

Differences in NO_3 sinks likely also contribute to the effects of vegetation on NO_3 concentration in soil water. Assuming that the microbial biomass is at steady state with respect to N, the two main sinks for NO_3 in soil are plant uptake and denitrification. The effects of vegetation type may be due to differences in root architecture. Mature trees generally have relatively shallow nutrient-absorbing root systems, aside from the deep roots used for anchoring, that may result in less opportunity for interception of nitrate deeper into the soil profile than in vegetation with a greater concentration of fine roots at greater depths. For example, more than 90% of the small, nutrient-absorbing roots were in the top 12.5 cm of soil in a pine forest on clay soils of North Carolina (Coile, 1937). Furthermore, the roots most actively involved in nutrient uptake are often found outside the drip line, whereas we took soil and water samples within the area under the tree canopy, in part to avoid encroaching on other vegetation types. Leaf fall appears unlikely to be an important factor. Hardwood and conifer stands contribute only 19 and 26 kg N ha^{-1} , respectively (Kozlowski et al., 1991). This is a modest amount of N and its mineralization can occur over a 5-18 year period. Thus leaf fall in autumn is unlikely to contribute significantly to N leaching.

We speculate that differences in denitrification rates - higher in vegetation types with low soil water nitrate and lower in those with high nitrate levels - may also contribute to the effects of vegetation on soil water NO_3 levels. Such differences may arise from different inputs of biodegradable organic C that can be used by denitrifying bacteria, and/or the establishment of anaerobic conditions that support denitrification. Our data show that the concentration of NO_3 in soil water decreases with higher soil organic matter, suggesting that differences in bioavailable C may affect soil water nitrate by controlling rates of denitrification. Since OM contributes to water holding capacity, it may also affect NO_3 dynamics via establishment of conditions conducive to denitrification. A high level of mulch-derived organic matter may thus contribute to reduction of NO_3 leaching in landscaped areas.

Our results have implications for the design and management of sustainable landscaping to maintain groundwater quality. Woodlands clearly are the most benign type of vegetation with respect to potential for NO_3 leaching into groundwater. As such, their incorporation in an undisturbed state into landscape designs should be given serious consideration. Annual and perennial flowers and deciduous and evergreen shrubs also contribute minimally to soil water NO_3 , and thus should be given priority in terms of area covered by plantings. By contrast, trees, turf, ground cover plants, and unplanted areas are most likely to contribute higher levels of NO_3 to ground water, and thus should be used sparingly. In the case of turf, the combined effects of long-term establishment,

fertilizer additions, and clover invasion may have contributed to NO_3^- beyond what has been observed by others (e.g. Petrovic, 1990; Cohen et al., 1999; Jiang et al., 2000).

Aesthetically pleasing landscaping and protection of groundwater quality may be achieved by minimizing disturbance of existing natural woodlands, reducing the unplanted areas and areas covered by vegetation types that are associated with high levels of soil water NO_3 , and making more extensive use of those landscaping plants that show minimal soil water NO_3 levels. Those areas most likely to leach NO_3^- were monoculture or sparsely vegetated areas (e.g. under trees, unplanted-mulched areas), whereas densely planted and diversified landscapes are better able to capture mineralized N and less likely to permit NO_3^- leaching.

ACKNOWLEDGEMENTS

We thank Cheryl Tefft, Nicole Schwarz, Tracey Daly, Andrea Bixby, Maricruz Merino, Jack Barry, and Charles Gilbert for their help with different aspects of this study.

REFERENCES

- Bushoven, J.T., Z. Jiang, H.J. Ford, C.D. Sawyer, R.J. Hull, and J.A. Amador. 2000. Stabilization of soil nitrate by reseeding with perennial ryegrass following sudden turf death. *J. Environ. Qual.* 29:1657-1661.
- Coile, T. S. 1937. Distribution of forest tree roots in North Carolina Piedmont soils. *J. For.* 35:247-257.
- Emmett, B. A., B. Reynolds, P. A. Stevens, D. A. Norris, S. Hughes, J. Gorres, and I. Lubrecht. 1994. Nitrate leaching from afforested Welsh catchments - Interactions between stand age and nitrogen deposition. *Ambio* 22:386-394.
- Erickson, J. E., J. L. Cisar, J. C. Volin, and G. H. Snyder. 2001. Comparing nitrogen runoff and leaching between newly established St. Augustinegrass turf and an alternative residential landscape. *Crop Sci.* 41:1889-1895.
- Gold, A. J., W. R. DeRagon, W. M. Sullivan, and J. L. Lemunyon. 1990. Nitrate-nitrogen losses to ground water from rural and suburban land uses. *J. Soil Water Conserv.* 45:305-310.
- Hallberg, G. R. 1989. Nitrate in ground water in the United States. p. 35-74. *In* R.F. Follett (ed.) *Nitrogen Management and Ground Water Protection*. Elsevier, Amsterdam, The Netherlands.
- Hendershot, W.H., H. Lalonde, and M. Duquette. 1993. Soil reaction and exchangeable acidity. p.141-145. *In* M. R. Carter (ed.) *Soil Sampling and Methods of Analysis*. Lewis Publ., Boca Raton, FL.
- Jiang, Y., and B. Huang. 2002. Effects of drought or heat stress alone and in combination on Kentucky bluegrass. *Crop Sci.* 40:1358-1362.
- Jiang, Z., J. T. Bushoven, H. J. Ford, C. D. Sawyer, J. A. Amador, and R. J. Hull. 2000. Mobility of soil nitrogen and microbial responses following the sudden death of established turf. *J. Environ. Qual.* 29:1625-1631.
- Karam, A. 1993. Chemical properties of organic soils. p. 459-485. *In* M. R. Carter (ed.) *Soil sampling and methods of analysis*. Lewis Publ., Boca Raton, FL.
- Keeney, D. R., and D. W. Nelson. 1982. Nitrogen - Inorganic forms. p. 643-698. *In* A. L. Page et al. (eds.) *Methods of Soil Analysis*. Part 2. 2nd ed. Agron. Monogr. 9. ASA and SSSA, Madison, WI.
- Kozłowski, T. T., P. J. Kramer, and S. E. Pallardy. 1991. *The Physiological Ecology of Woody Plants*. Academic Press, San Diego.
- Petrovic, A.M. 1990. The fate of nitrogenous fertilizers applied to turfgrasses. *J. Environ. Qual.* 19:1-14.
- Porter, K.S., D.R. Bouldin, S. Pacenka, R. S. Kossack, C. A. Shoemaker, and A. A. Pucci, Jr. 1980. Studies to assess the fate of nitrogen applied to turf: Part I. Research Project Technical Completion Report OWRT Project A-086-NY, Cornell Univ., Ithaca, NY.
- Qian, Y. and R. F. Follett. 2002. Assessing soil carbon sequestration in turfgrass systems using long-term testing data. *Agron. J.* 94: 930-935.
- Qian, Y., W. Bandaranayake, W. J. Parton, B. Meham, M. A. Harivandi, and A.R. Mosier. 2003. Long-term effects of clipping and nitrogen management in turfgrass on soil organic carbon and nitrogen dynamics: The CENTURY model simulation. *J. Environ. Qual.* 32:1694-1700.

Table 1. Scientific and common names of plants in different vegetation types studied.

Vegetation type	Scientific name	Common name
Annual flowers	<i>Dahlia</i> spp.	Annual dwarf dahlia
	<i>Impatiens valleriana</i>	Dwarf impatiens
	<i>Zinnia elegans</i>	Zinnia
	<i>Portulaca grandiflora</i>	Rose moss
	<i>Lobelia erinus</i>	Blue annual lobelia
Deciduous shrubs	<i>Corylopsis spicata</i>	Spike winter-hazel
	<i>Clethra alnifolia</i>	Summersweet
	<i>Syringa reticulata</i>	Japanese tree-lilac
	<i>Syringa meyeri</i>	Garden lilac
	<i>Fothergilla gardena</i>	Dwarf fothergilla
Deciduous trees	<i>Betula papyrifera</i>	Paper birch
	<i>Syringa reticulata</i>	Japanese tree-lilac
	<i>Metasequoia glyptostroboides</i>	Dawn redwood
Evergreen shrubs	<i>Taxus baccata</i>	English yew
	<i>Ilex glabra</i>	Inkberry
	<i>Rhododendron</i> ‘Catawbiense’	Rhododendron
	<i>Microbiota decussata</i>	Siberian carpet grass
	<i>Kalmia latifolia</i>	Mountain laurel
	<i>Rhododendron chinoides</i>	Rhododendron
Evergreen trees	<i>Pinus strobus</i>	Eastern white pine
	<i>Thuja occidentalis</i>	American arborvitae
	<i>Sciadopitys verticillata</i>	Japanese umbrella pine
	<i>Pinus mugo</i>	Dwarf pine
	<i>Sarcococca hookeriana</i>	Sweet box
	<i>Picea glauca</i> var. <i>albertiana</i>	Alberta spruce
Ground cover	<i>Vinca minor</i>	Myrtle
	<i>Arctostaphylos uva-uris</i>	Bearberry
	<i>Ajuga reptans</i>	Carpet bugle
	<i>Pachysandra terminalis</i>	Pachysandra
Perennial flowers	<i>Veronica alpina</i>	Spiked speedwell
	<i>Cimicifuga racemosa</i>	Black cohosh
	<i>Hemerocallis</i> spp.	Daylily
	<i>Hosta</i> -X “Krossa regal”	Hosta
	<i>Coreopsis verticillata</i>	Threadleaf coreopsis
Turf	<i>Festuca rubra</i> ssp. <i>commutata</i>	Chewings fescue
	<i>Trifolium repens</i>	White clover
Native woodland	<i>Dennstaedtia punctiloba</i>	Hay-scented fern
	<i>Similax</i> spp.	Green brier
	<i>Fagus grandifolia</i>	American beech
	<i>Quercus velutina</i>	Black oak
	<i>Betula populifolia</i>	Gray birch
	<i>Osmunda cinnamomea</i>	Cinnamon fern
	<i>Lycopodium</i> spp.	Club-moss

Table 2. Organic matter content and pH of soil under different vegetation types.

Vegetation type	O.M. content (g kg⁻¹)	pH
Native woodland	242 ± 49	5.24
Perennial flowers	123 ± 6	6.09
Annual flowers	139 ± 20	6.38
Deciduous shrubs	129 ± 26	6.02
Evergreen shrubs	166 ± 75	6.00
Evergreen trees	169 ± 61	6.02
Deciduous trees	165 ± 63	5.86
Turf	99 ± 16	6.07
Unplanted - mulched	107 ± 25	6.13
Ground cover	105 ± 24	6.05

Table 3. Concentration of NO₃ in soil water and of extractable soil NO₃ and NH₄ under different vegetation types. Data were pooled for the June 2002 to November 2003 sampling period.

Type of vegetation	Soil water NO ₃ conc. (mg N L ⁻¹)				Extractable soil NO ₃ conc. (µg N g ⁻¹)				Extractable soil NH ₄ conc. (µg N g ⁻¹)			
	n	Median ¹	25%	75%	n	Median	25%	75%	n	Median	25%	75%
Native woodland	95	0.0 a	0.0	0.1	77	0.5 a	0.4	0.8	70	6.7 b	4.6	23.0
Perennial flowers	45	0.2 b	0.1	0.8	60	3.4 b	2.0	6.3	60	3.6 a	2.3	8.8
Annual flowers	30	0.3 b	0.1	1.1	42	3.1 b	2.2	3.9	42	10.1 b	4.9	20.3
Deciduous shrubs	47	0.3 b	0.1	1.4	63	4.8 b	2.8	9.3	61	4.8 ab	2.9	11.2
Evergreen shrubs	63	0.3 b	0.1	1.2	76	4.0 b	2.8	6.0	76	4.8 ab	2.7	10.8
Evergreen trees	52	1.4 c	0.4	4.1	68	4.3 b	2.7	7.4	68	3.6 a	2.4	7.5
Deciduous trees	40	1.8 c	0.4	4.1	45	5.0 b	2.5	10.1	46	6.8 b	3.6	13.4
Turf	34	3.0 c	0.6	10.8	70	7.8 b	3.6	16.8	65	4.7 ab	2.9	14.0
Unplanted - mulched	73	3.7 c	0.8	8.6	67	4.2 b	2.6	7.5	64	5.4 ab	2.9	12.7
Ground cover	63	7.8 c	1.7	15.4	70	5.2 b	3.2	8.8	72	4.0 a	2.4	11.4

¹Values followed by the same letter within a column were not significantly different ($P < 0.05$).

1

FIGURE LEGENDS

Fig. 1. Soil water NO_3 concentration under different landscaping vegetation types as a function of sampling date from June 2002 to November 2003. Values are medians ($n \geq 3$). Bold horizontal line represents regulatory limit for $\text{NO}_3\text{-N}$ in drinking water (Hallberg, 1989). AF = annual flowers; BL = unplanted-mulched; DS = deciduous shrubs; DT = deciduous trees; ES = evergreen shrubs; ET = evergreen trees; GC = ground cover; PF = perennial flowers; T = turf; W = native woodland.

Fig. 2. Concentration of extractable NO_3 in soil under different landscaping vegetation types as a function of sampling date from June 2002 to November 2003. Values are medians ($n \geq 3$). Abbreviations as in Fig. 1.

Fig. 3. Concentration of extractable NH_4 in soil under different types of landscaping vegetation types as a function of sampling date from June 2002 to November 2003. Values are medians ($n \geq 3$). Abbreviations as in Fig. 1.

Fig. 4. Scatter plots of median soil water NO_3 vs. soil organic matter content (A), median extractable soil NO_3 (B), median extractable soil NH_4 (C), and soil pH (D). Abbreviations as in Fig. 1.

Fig. 1

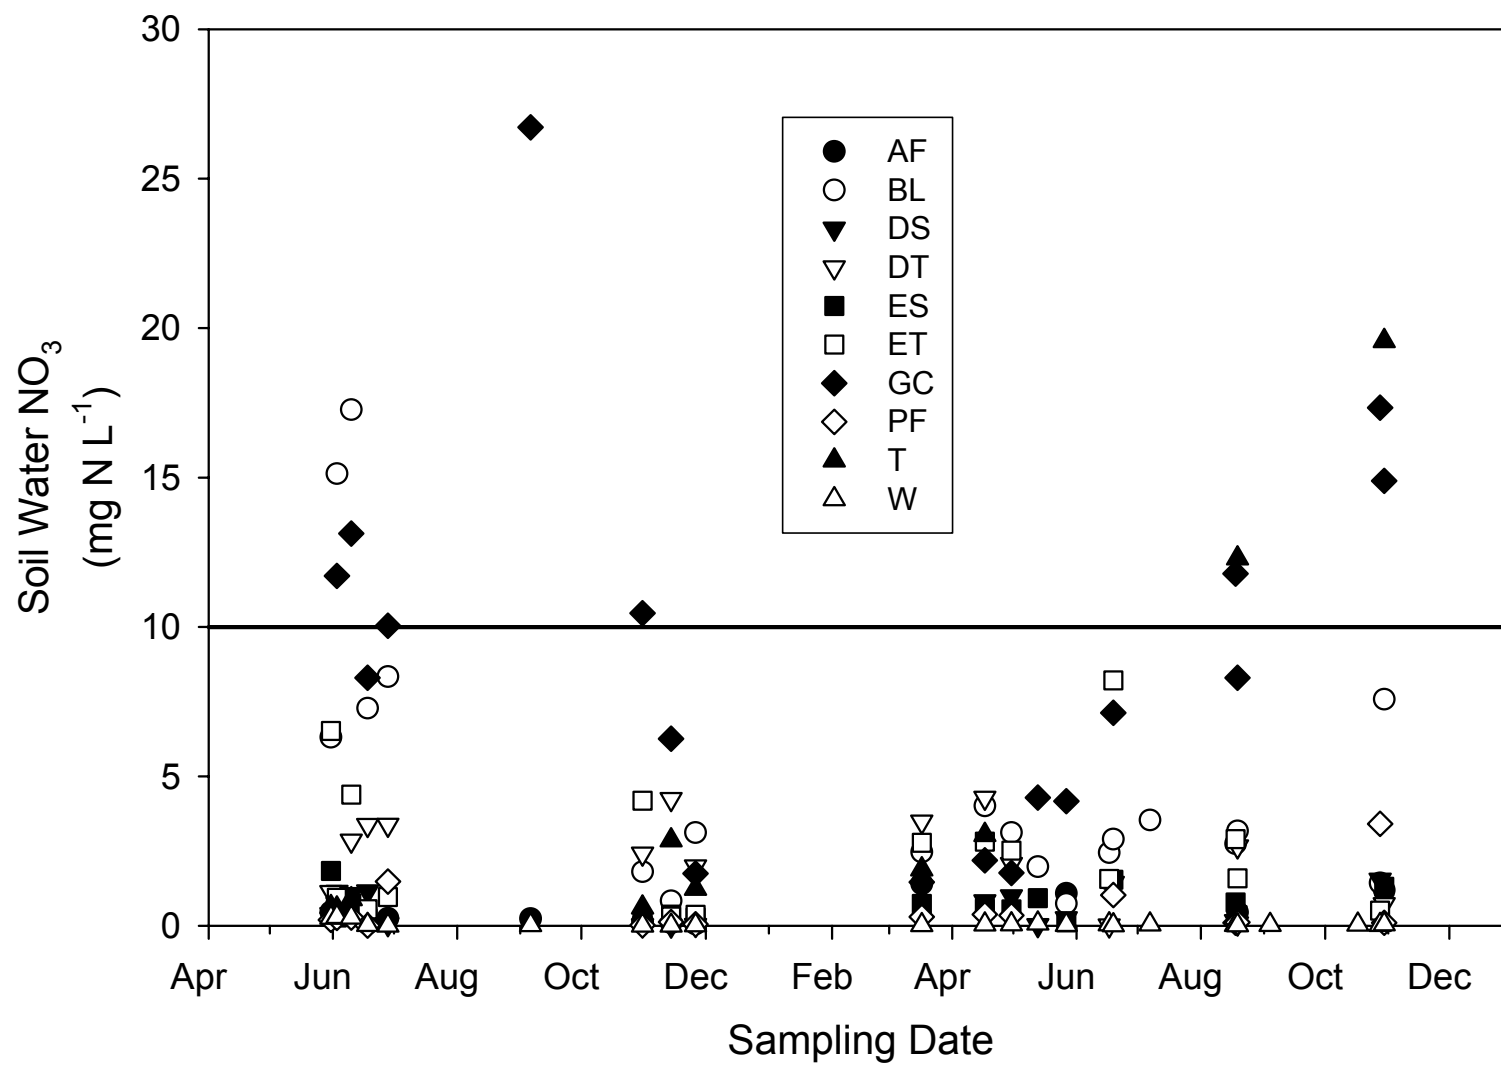


Fig. 2

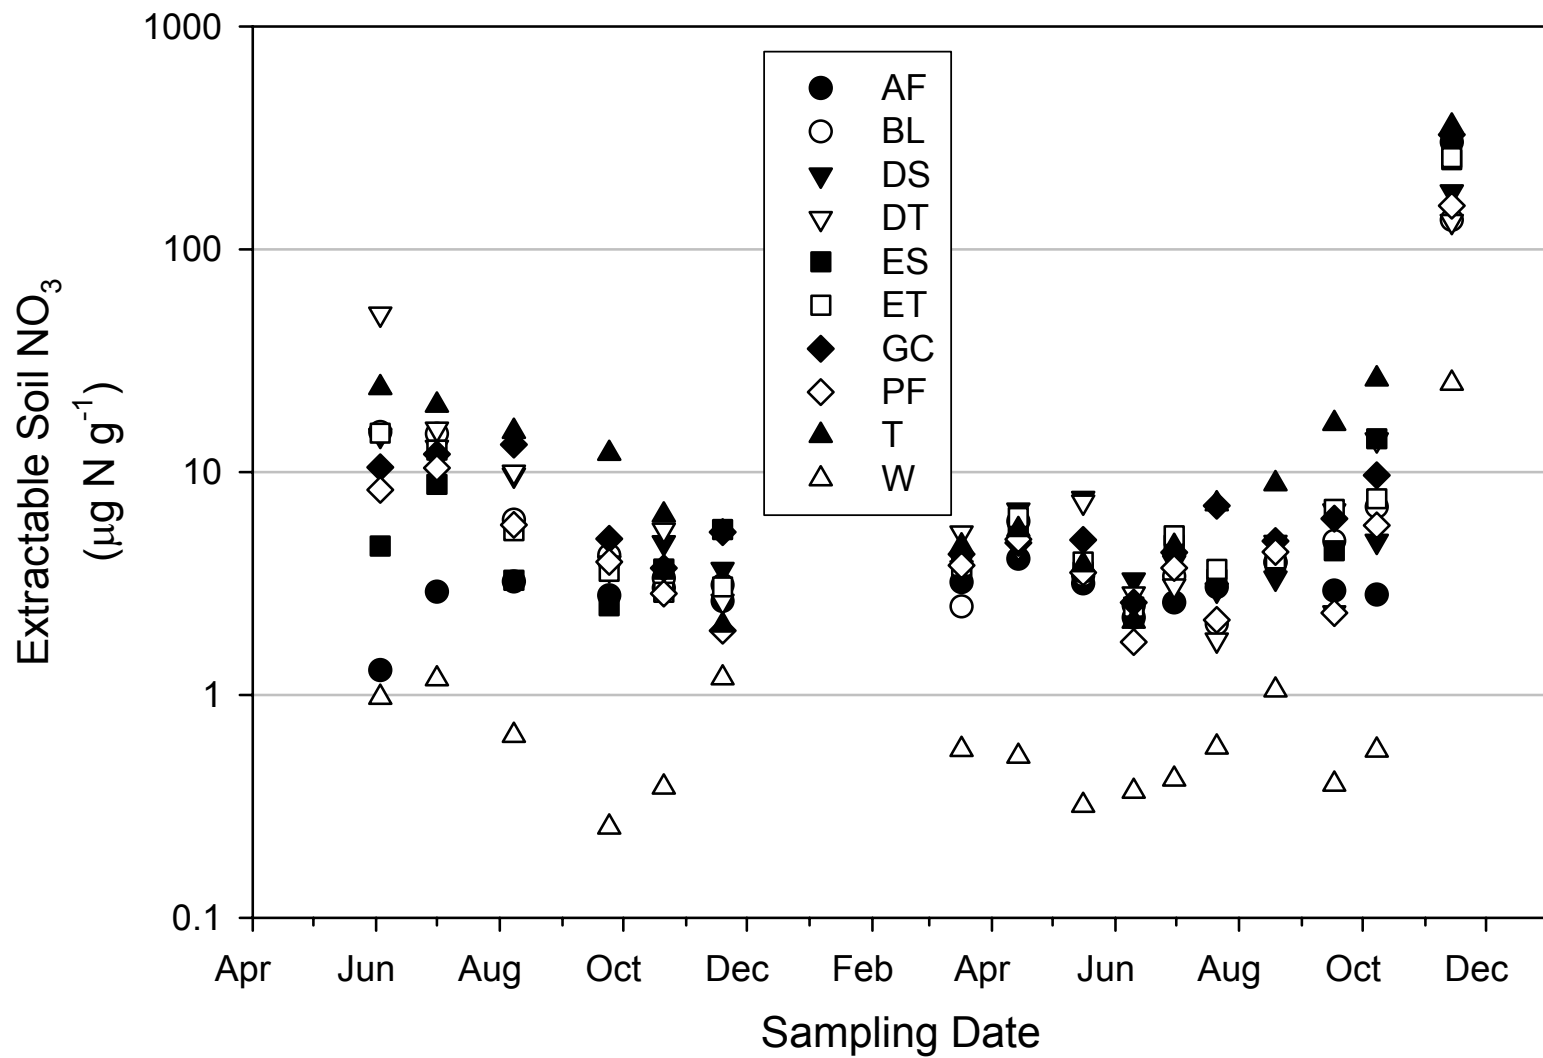


Fig. 3


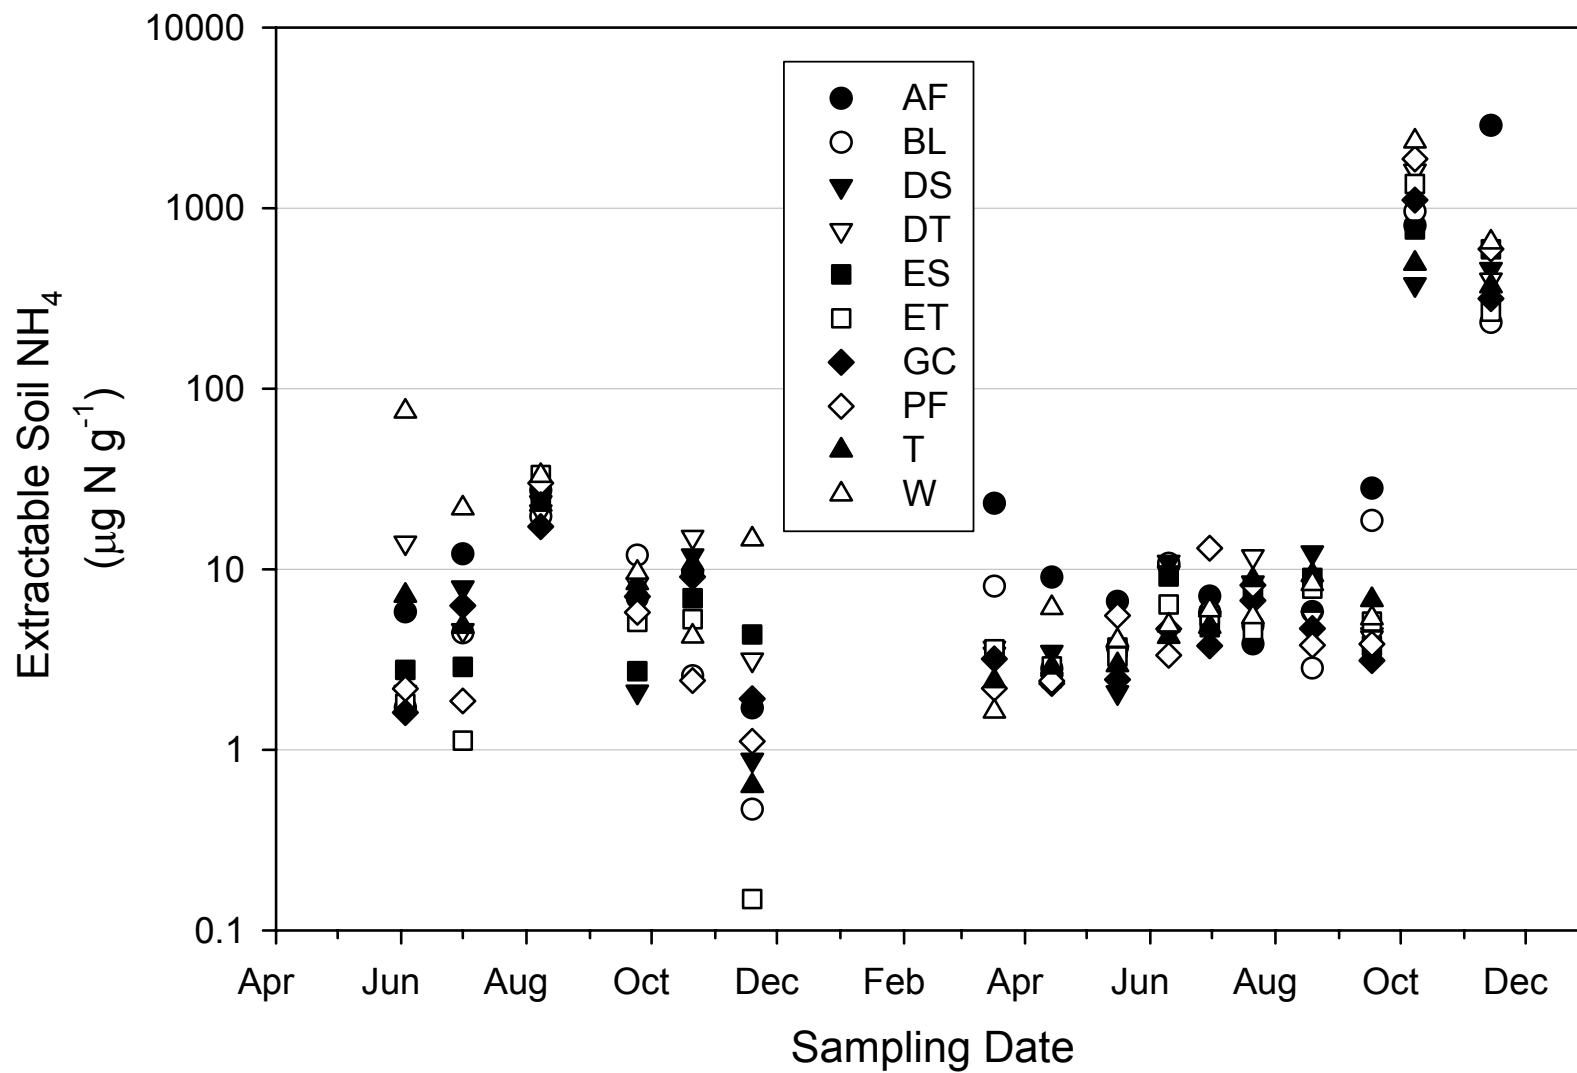


Fig. 4

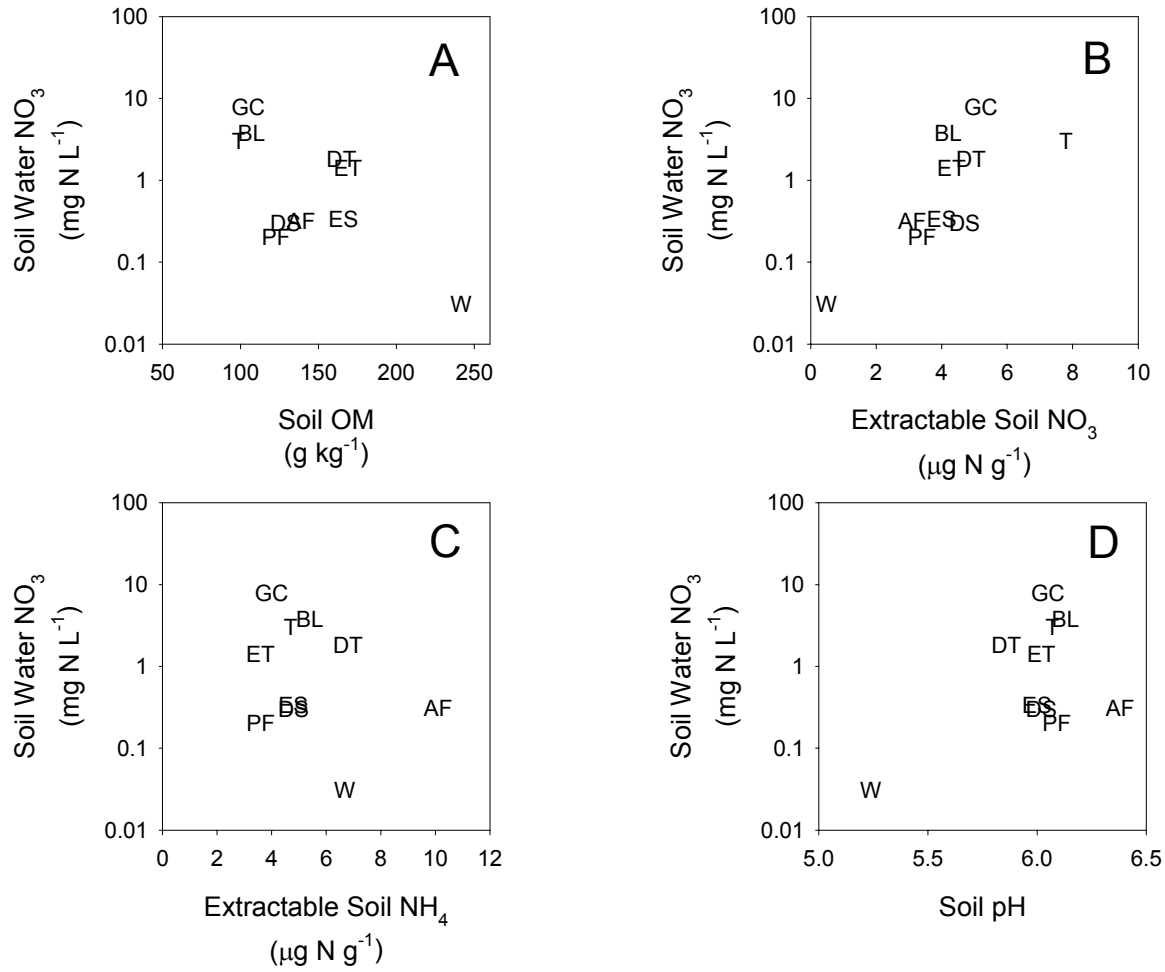

Information Transfer Program

The information transfer program funded the creation of two web sites to allow access to water resources research data.

A Preliminary Web Portal for RI Water Resources

Basic Information

Title:	A Preliminary Web Portal for RI Water Resources
Project Number:	2003RI15B
Start Date:	6/1/2003
End Date:	5/31/2004
Funding Source:	104B
Congressional District:	02
Research Category:	Not Applicable
Focus Category:	Water Use, Education, Management and Planning
Descriptors:	
Principal Investigators:	Thomas Boving, David Fastovsky

Publication

INTRODUCTION

"When the well's dry, we know the worth of water."- Ben Franklin

Although southern New England is not commonly considered a region in which water abundance (as distinct from water quality) is a problem, the record from the previous few years suggests that water abundance is indeed an issue about which RI citizens need to be informed. This was exemplified during the most recent draught (2002), when water levels in New England's reservoirs reached historic lows and citizens were asked to restrict water use to only the most urgent applications (e.g. WRB 2002). Our project was a response to this situation. The purpose of the project was to a) construct a widely available and easily comprehensible website documenting water abundance in RI; and b) present current and historical data pertaining to the Scituate Reservoir and its water levels. The goal was to provide a pilot website that eventually will afford a comprehensive, accurate, lucid, and real-time presentation of Rhode Island's water resources.

Although it is relatively easy to find water-related websites in the State of Rhode Island, no comprehensive, real-time, easily understood treatment of water level issues in Rhode Island exists. Providence Water (www.provwater.com) provides regular press releases qualitatively describing the abundance of water in Rhode Island. Details – if provided – pertain only to conditions in the Scituate Reservoir. The US Geological Survey (water.usgs.gov/cgi-bin/daily) maintains a web site that shows maps of “real-time streamflow” data presented in a historical context. NOAA (www.noaa.gov) provides climatological data such as rainfall, temperature, drought indices, and other climatic variables. The State of Rhode Island Water Resources Board (www.wrb.state.ri.us) provides a broad range of data, web links, and press releases dealing with water-related issues.

But none of the agencies and sites listed above provides a comprehensive, easily understood, real-time treatment of water levels in key RI reservoirs and aquifers. Because the Scituate Reservoir is perhaps the most important (and visible) public water source in the state of Rhode Island, we have chosen to focus attention on it for this preliminary study. We have compiled a multi-year graphic record of water levels in the Scituate Reservoir, and have associated fluxes in these levels with climatic events and relevant historical data (e.g., average water levels in previous years). Examples of these records are incorporated into the body of this report.

Public education and awareness are crucial aspects of drought management. Sometimes, random drought messages through the news media can cause alarm regarding the integrity of supply or the safety of drinking water. A concerted education and outreach program is essential to provide information when wells go dry, or to inform the public and major users of ways to conserve or find alternate sources of water. The web site was designed to provide meaningful information to a wide range of constituents, including students; all of whom, as a result of the web-site, will be in a better position to understand water-use policies.

METHODS

A project website was created using the Dreamweaver MX software package by Macromedia Inc. (licensed to PI). The website was uploaded to the Department of Geosciences webserver (Dell PowerEdge 6400) and was titled “RI Drinking Water Supply Data Base”. The webserver is secured from unauthorized access by various safety measures (including a firewall and password access protection). The server and the website are remotely accessible to the PI, allowing for frequent updates and additions of data. The website can be accessed via <http://ri-water.geo.uri.edu/scituate.asp> . It was embedded into an existing “Environmental Restoration” website, which provides links to other water related projects of the Geosciences department.

Scituate water level data were collected by the Providence Water Supply Board (PWRB) using fully automated procedures. The data consisted of four readings per day (every six hours) and include, in addition to Scituate Reservoir water levels, PWRB drinking water plant influent, water consumption by 11 water suppliers served by PWRB, and water levels in 5 water storage facilities are recorded. The data set is delivered by email to the PI at 7 AM every morning. Table 1 shows an example of the daily transmitted data set. Because of security concerns, it was decided not to publicize any of the additional daily data.

From: root <root@provwater.com> Date: Wed, 19 May 2004 07:10:00 -0400 To: boving@uri.edu																		
05/18/04	13:00	285.057	69.1417	480.658	393.631	303.78	12.697	227.949	225.499	9.26518	1.24969	2.28791	3.3138	4.72344	6.96557	6.88278	4.85958	8.15824
05/18/04	19:00	285.057	83.5459	483.33	396.523	302.938	12.598	226.943	224.598	9.36466	1.25306	2.40513	3.27106	4.38828	6.63736	9.55678	4.11722	8.57436
05/19/04	01:00	285.028	86.2091	482.377	395.497	303.121	12.2964	227.946	224.598	8.76713	0	0.0315018	0	3.43773	2.23297	2.97436	3.7265	5.96044
05/19/04	07:00	285.057	86.7664	481.249	393.241	304.879	12.796	229.448	225.8	9.16408	0	2.48425	3.33578	3.95971	6.82784	8.6337	4.1514	9.19853

Figure 1: Example of the daily updated Scituate Reservoir levels automatically recorded by the PWRB every six hours (first three columns). All other columns show water fluxes to the main PRWB customers, elevations in local water storage facilities, and PRWB drinking water plant influent.

RESULTS

The “RI Drinking Water Supply Data Base” website was designed to adhere to latest industry standards, as well as for ease-of-use. All descriptions and explanations were kept short and scientific jargon was minimized. The material presented is understandable by users Grade 7 and higher, an important consideration since it was our intent that this resource be available to and useful for secondary-school students.. The website relies heavily on visualization (e.g. a graph of the current Scituate Reservoir level can be uploaded by simply clicking on a thumb-nail picture). Resolution and graph size were kept at moderate levels for minimal download times. This was deemed necessary to serve those citizens that do not have access to high-speed internet connections. The website also provides links to key water-supply resources, such as the Providence Water Supply Board (PWSB), the Rhode Island Water Resources Board (WRB) and the Rhode Island Water Resources Center websites. The WRB in particular provides additional information about the status of Rhode Island’s water resources. For example, the WRB issues a *Draught Advisory*, *Watch*, *Warning*, and *Emergency* (in order of increasing draught severeness) if warranted.

The central parts of the project website are a description of the data flow and the graphic representation of the water level and water consumption data. The following paragraph is an excerpt from the website.

“The Scituate Reservoir, located about 15 miles west of Providence, RI, serves most of Rhode Island’s population with drinking water. Water storage in the main Scituate reservoir began in 1925 and a nearby treatment plant went in operation in 1926. Since then, the water level in the reservoir has been constantly monitored. In recent years, the Scituate Reservoir was equipped with modern computer based recording equipment to monitor reservoir water level and treatment plant influent. The digital records are collected by the Providence Water Supply Board (PWBS), which operates the Scituate Reservoir. PWBS then forwards water level and plant influent data automatically to Dr. Boving’s data base where the data stream is converted into graphs for immediate display on this website.”

Figure 2 shows an example of the water data as displayed on the project website. The graph was generated from daily data sets supplied automatically via email by PWBS. All incoming data were retrieved over a T-1 line. At URI-GEO the incoming data converted into a common data format (ASCII comma delimited format). Incoming data was stored on a PC (Dell Dimension 8200) and backed up on an external hard-drive (Maxtor 120 GB) on a weekly basis. Raw data are loaded into MS-EXCEL (the statewide standard).

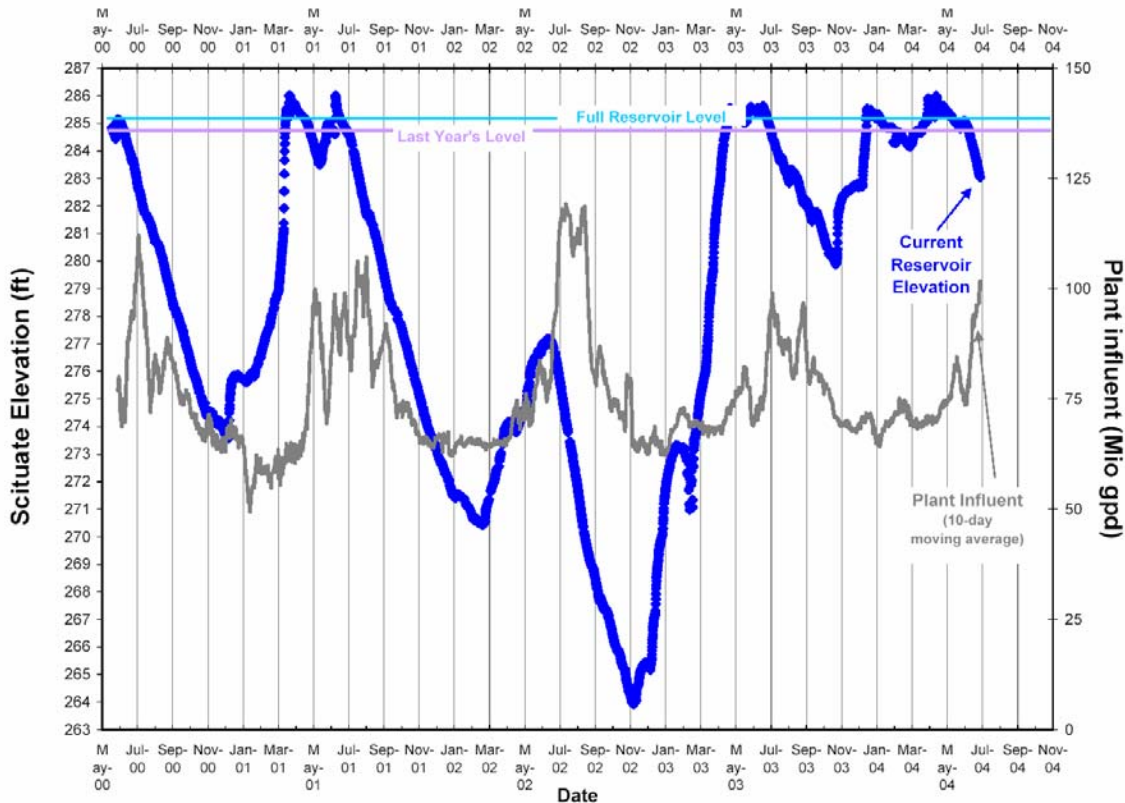


Figure 2. Water levels in the Scituate Reservoir, 05/01/00 – 06/30/04. Diamond line represents approximately 5700 data points taken at a rate of 4/day. Solid line represents a 10-day moving average of plant influent. Also indicated are last year’s reservoir level and the Scituate Reservoir overflow elevation (285 ft above sea level).

In the future, an upgrade to an ORACLE database system may become necessary as the amount of data generated approaches the capacity of EXCEL. Within the MS-EXCEL environment, data are organized by: data source, date and time of collection, sampling location, sample value, and comments. Besides calculating delta-values (=changes), the data are continuously added to graphs and tables. EXCEL graphs were converted into Adobe Acrobat files (pdf format). The graphs show, for example, daily water table fluctuations at a given measurement point. The 10-day moving average of the plant influent was calculated and graphed together with the daily water-level data. Currently, the raw data cannot not be downloaded from the website.

We have had preliminary success with a pilot system (Java script) that automatically extracts data from incoming PWRB email (see Figure 1) and converts it into an EXCEL graph. Currently, problems remain with linking the graph to the server. The ultimate goal is to automatically update the website in near real-time and to include data from as many reliable sources as possible. It is expected that a network will evolve and develop over a period of years, as additional monitoring, quality control, and data exchange systems are implemented and as hydrological modeling is incorporated. Our project is ongoing, and will continue even after the end of the current funding period.

ACKNOWLEDGEMENTS

This project was made possible by a grant from the Rhode Island Water Resources Center. We thank former URI graduate student Mr. Prashanth Galisukumar for his help developing the website and the data transfer protocols.

REFERENCES

State of Rhode Island Water Resources Board (WRB) – Press releases on 01/17/2002 and 10/02/02.

Electronic Dissemination of Institute Related Research

Basic Information

Title:	Electronic Dissemination of Institute Related Research
Project Number:	2003RI21B
Start Date:	3/1/2003
End Date:	2/29/2004
Funding Source:	104B
Congressional District:	2
Research Category:	Not Applicable
Focus Category:	Water Supply, Groundwater, Surface Water
Descriptors:	Online Publications
Principal Investigators:	George Tsiatas

Publication

1. N/A

Under this Information Transfer project work continued in disseminating past research funded by the Institute. The goal was to make available online most recent reports published by the Institute. To this effect, a document scanner was acquired and all available reports from the last 14 years were scanned, converted to a pdf format and placed online at the home page of the Rhode Island Water Resources Institute. Future work will include enhancing this site by providing a complete searching capability of the reports.

Student Support

Student Support					
Category	Section 104 Base Grant	Section 104 RCGP Award	NIWR-USGS Internship	Supplemental Awards	Total
Undergraduate	6	0	0	0	6
Masters	2	0	0	0	2
Ph.D.	0	0	0	0	0
Post-Doc.	0	0	0	0	0
Total	8	0	0	0	8

Notable Awards and Achievements

After studying the results of the research project "URI Water Conservatin Program Development" the University of Rhode Island committed \$60,000 from a grant to fund the construction and operation of a demonstration water recycling facility for their aquaculture center.

Publications from Prior Projects

None